


Hoisting an environmental container

The LHH-4500 F is a hydraulic hoisting hook that can be used for lifting different kinds of objects, for instance environmental containers.

The cylinder

The LHH-4500 F is equipped with a double-acting cylinder to open and close the hook.

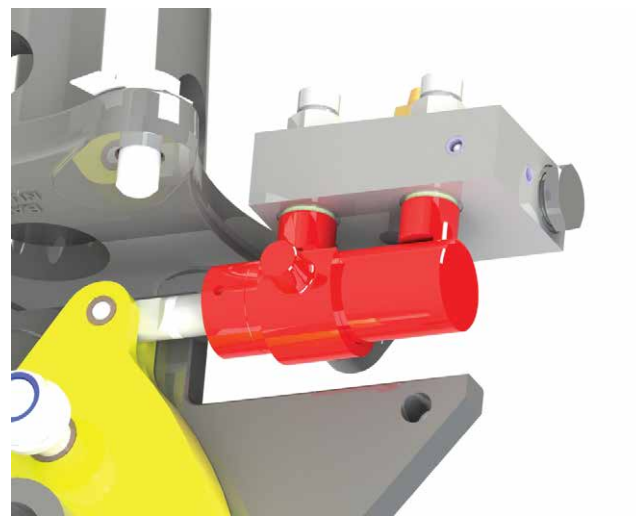

The safety device

The LHH-4500 F has been designed to meet or exceed applicable safety standards. The LHH-4500 F is standard equipped with a controlled non-return valve so that the hook cannot open without the driver giving a signal.

LHH 4500 F

HYDRAULIC HOISTING HOOK



Bakker Hydraulic Products

6662 NG Elst (Gld) Netherlands

Nijverheidsweg, 6


Tel. +31 (0)481-374757



Bakker Hydraulic Products

The jaw

The jaw opening of the LHH-4500 F is designed in such a way that it is easy to hook up the object to be lifted.

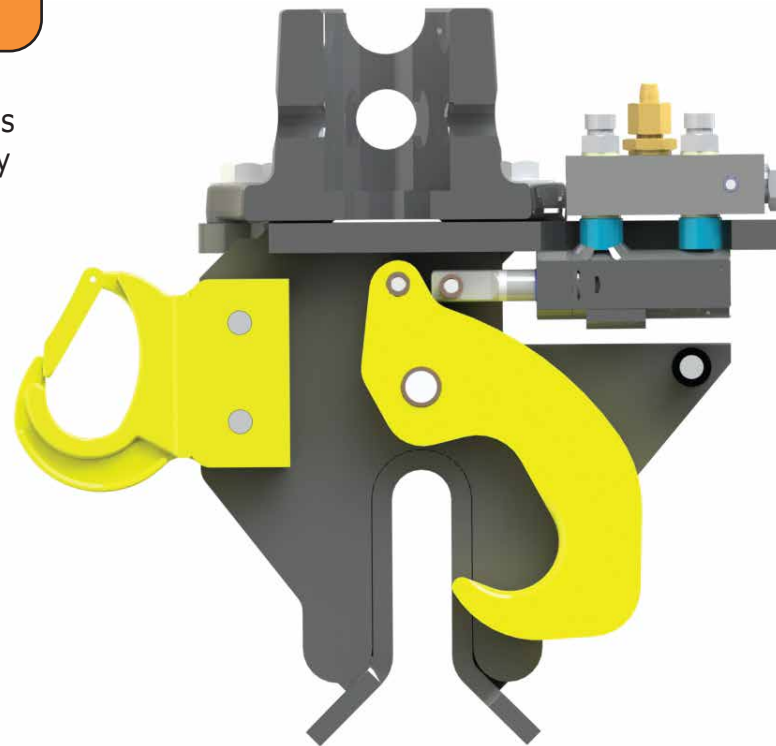

Valve and cylinder protection

The cylinder and the valve block are well protected in case of impact of objects from outside.





The suspension plate

The LHH-4500 F can be attached to any brand of shaft rotator. Because the suspension plate is mounted with bolts, it can be adjusted to accommodate the rotator presently in use.



Material of the jaw

The LHH-4500 F is standard equipped with a steel jaw plate that allows for easy lifting of objects.

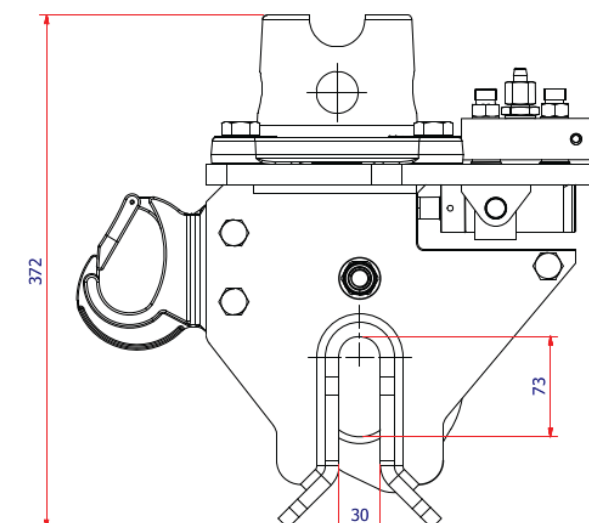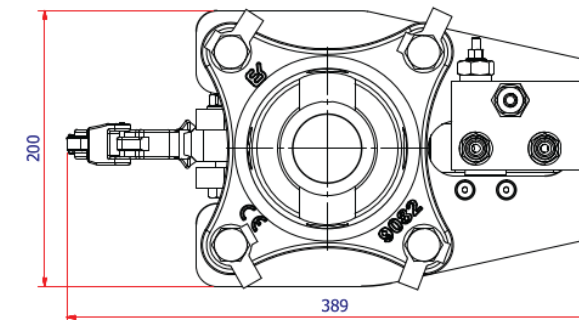

Type	LHH-4500 F
Weight	20 kg
Capacity	4500 kg
Working pressure	80 bar