




Bakker Hydraulic products bv

HBBM - GRAB

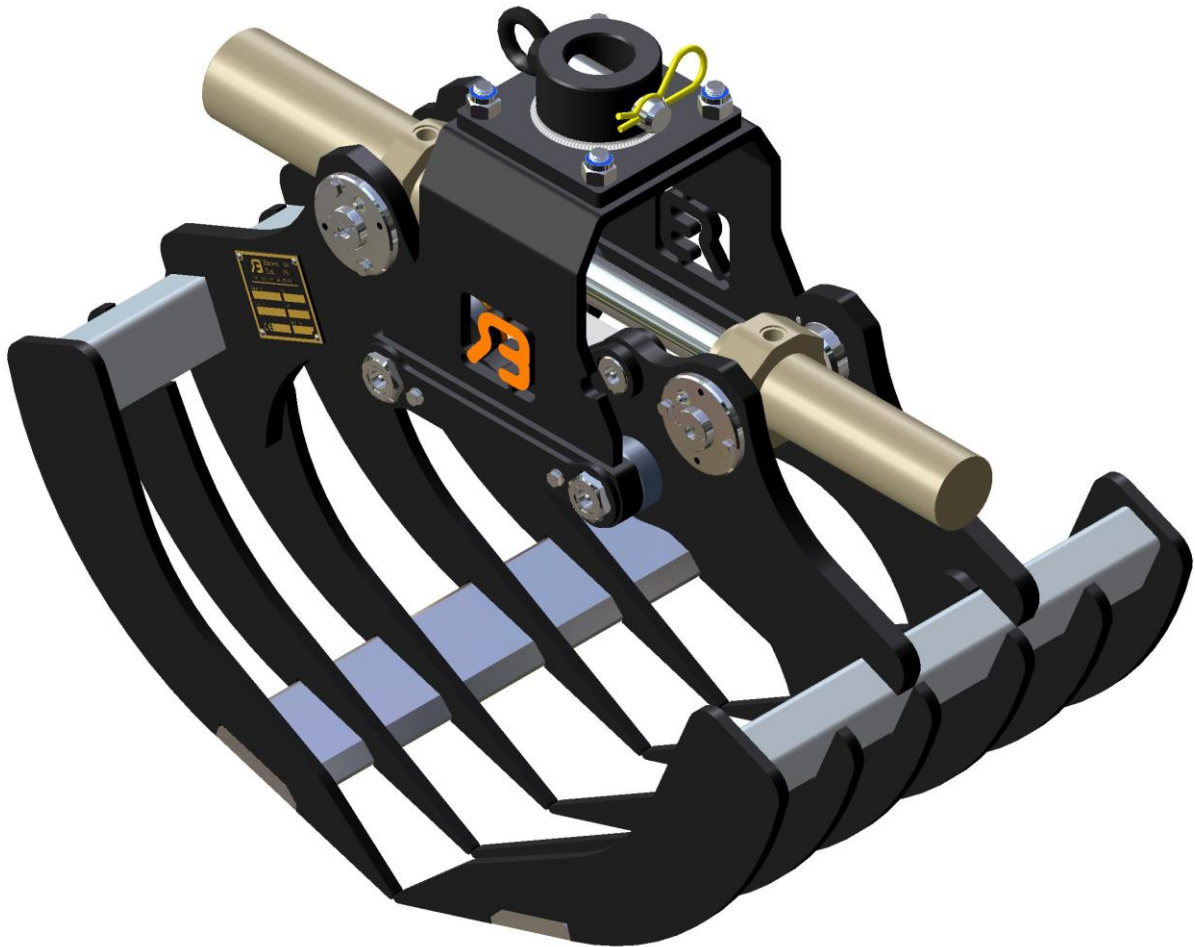

This versatile grab is based on the HBB/O grab and can be used on mini excavators of 1500 – 3000 kg. It can also be used on backhoe loaders and lorry loading cranes.

The “teeth” are made of high-quality material, thus guaranteeing a long service life.

The HBBM is suitable for loading/unloading manure, removing dirt from watercourses, picking up large pieces of rubble, etc.

The standard model is equipped with a cylinder fitted with two pistons.

Accessories: Suspension plate, rotator, link.

Type	Blade length	Capacity	Weight	Working pressure	Grabbing force
HBBM 40	400 mm	60 ltr	100 kg	220 Bar	23 kN
HBBM 50	500 mm	75 ltr	115 kg	220 Bar	23 kN

Right to make changes is reserved.